

## 7000 Series Vertical PVC Guide-On (Pair) Instructions

Part # 1029052

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	1021988	PVC Pipe 3" Sch 40 x 5' with Cap
2	1	1029049	Wdmt 7k Verticle Guide - Left
3	1	1029050	Wdmt 7k Vertical Guide - Right
4	2	1005640	701066 Accessory Pocket Flat Side
-	1	1029051	Bolt Bag - 7k Vertical Guide - Pair
5	8	1002599	Washer Flat 3/8 SS 304
6	8	1002422	Bolt Hex 3/8-16 x 1.25 SS 304
7	8	1001802	Nut Hex Flange 3/8-16 Serrated Brass



Failure to follow instructions may result in personal injury and may invalidate the applicable warranty.

**Step 1.** Determining the placement of the guide-on's. Position the boat on the lift as desired. Place the guide-on's within 1-2 inches from either side of the boat. Be sure that the guide-on's are placed to allow clearance for the widest portion of the boat.

**Step 2.** Fasten Item 2 & 3 (Weldment Verticle Guide - Left & Right) and Item 4 (Accessory Pocket Side) to lift rack using Qty (4) each of Hex Bolts 3/8-16x1.25", Flat Washers and 3/8-16 Flange Nuts per both left and right side guide-on's (as shown).

**NOTE:** A trigger / single-hand style clamp works well to secure Item 2 & 3 (Weldment Verticle Guide - Left & Right) and Item 4 (Accessory Pocket Side) in position while installing and securing fasteners.

**Step 3.** Slide Item 5 (PVC Pipe with Cap) onto both Verticle Guide-on weldments, until the base of the PVC Pipe rests on the Vertical Guide pins.

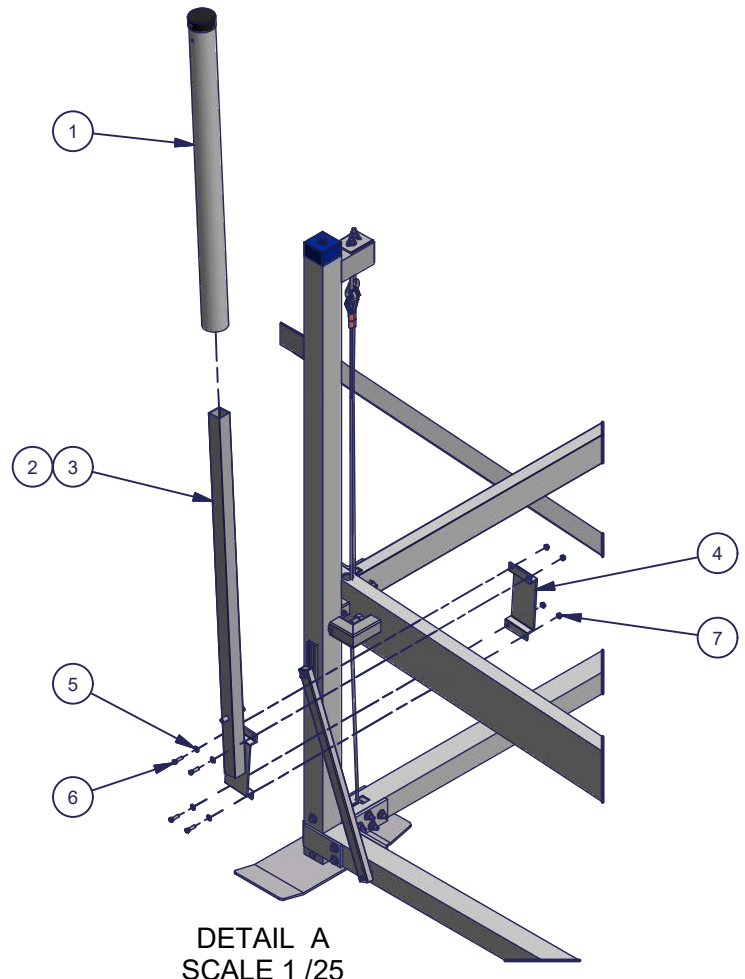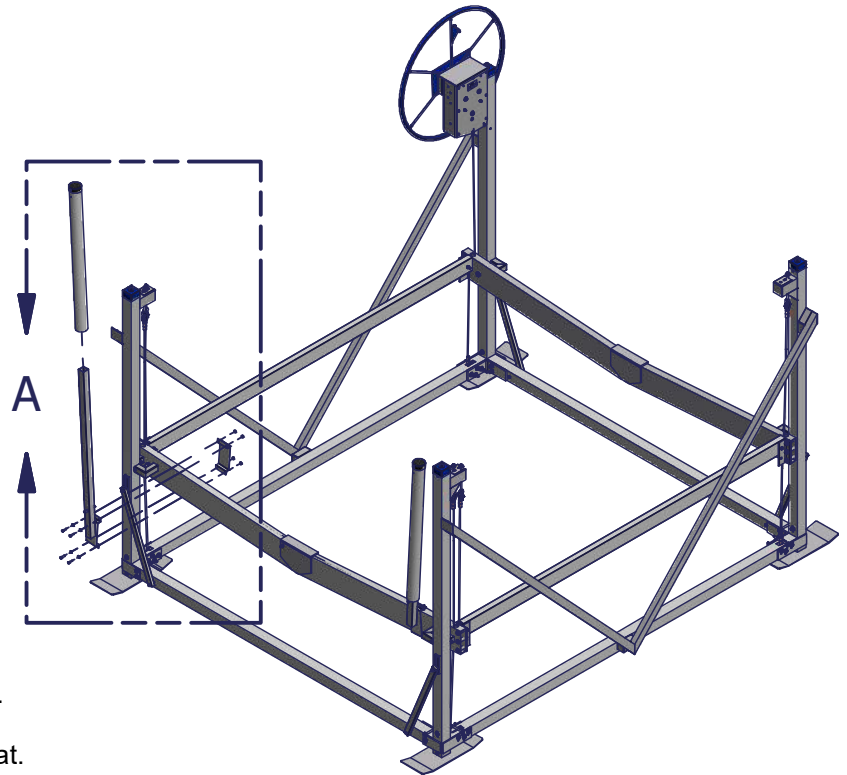

**NOTE:** Position the angle of Vertical Guide's in an outward direction from lift center

